

TWO NEEDLE LOCKSTITCH MACHINE

T8200

42

-

064

M

L

/

C

Model

T8200

Minimum lubrication type two needle lockstitch machine

DT8200

Direct-drive, minimum lubrication type two needle lockstitch machine



No.	mm	inch
028	2.8	1/10"
032	3.2	1/8"
040	4.0	5/32"
048	4.8	3/16"
064	6.4	1/4"
079	7.9	5/16"
095	9.5	3/8"
127	12.7	1/2"
159	15.9	5/8"
191	19.1	3/4"
222	22.2	7/8"
254	25.4	1"
381	38.1	1 1/2"

Sewing Material

L
Light

M
Medium

H
Heavy

Hook

L
Latch type

-
Cap type

Auto thread trimmer

	Machine Series	Thread Wiper	Presser foot lifer
C	T828	V	V
C-11	DT8200	V	
C-13	DT8200	V	V

Function

Sub-class	Needle feed	Standard hook	Big hook	Reverse feeding	Split needle bar
42	V	V	-	V	-
45	V	V	-	V	V
72	V	-	V	V	-
75	V	-	V	V	V


T8200/DT8200 SERIES FEATURES

T8200

Minimum lubrication type two needle lockstitch machine


DT8200

Direct-drive, minimum lubrication type two needle lockstitch machine

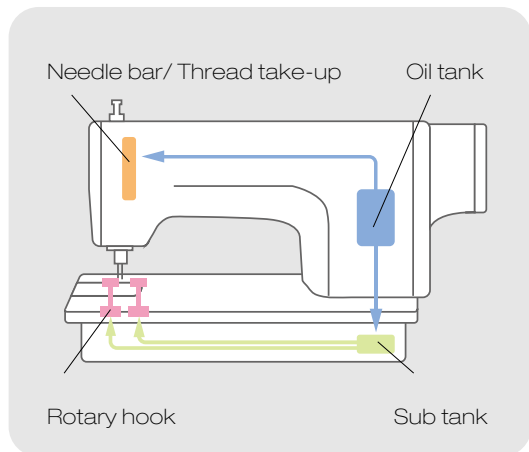

Minimum lubrication

With a sealed oil tank, accurately supplying clean oil to the specific mechanism.

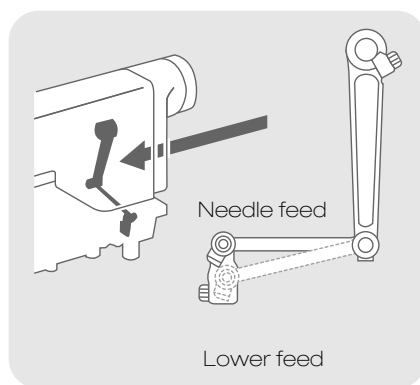

Needle-feed/ Lower-feed mode switch

- According to the sewing condition, customers may change the fabric feeding.
- Top/ Bottom feed connecting rod mechanism is applied with grease sealed type lubrication design to ensure the smooth movement.




Easy gauge conversion

Fine tune is easy due to the cam design for the hook base's adjusting mechanism. The needle-to-hook gap correction function ensures the needle to be at the hole center, even to use commercially available gauge sets.




Big application range of sewing material

The feed dog's slope and height are easily adjusted. The thread take-up is adjusted, too, so the application range of sewing material is big from light to medium



Better sewing quality

Slightly raise presser foot to have floating presser foot function, applicable to special materials such as elastic fabric or fleece. It prevents from fabric damage, and is easy for curve sewing.



定位桿
Stop lever
壓桿
Push lever
plate






Split needle bar type (-45/-75)

One / Two needle mode switching is easy. With safety design, one needle mode is safe as needle bar will not drop by accident touch of the switch during sewing.



Direct-drive thread trimmer type (DT8200)

- High energy saving, low noise and vibration
- Quick response, starting speed's mode is adjustable.
- Powerful motor, needle penetration power is strong.
- Thread trimmers timing is easy to be adjusted.

T3						Motor	Reverse Feeding	Wiper	Lifter	
	mm	mm	Needle No. DPX5	mm	S.P.M. (Max)					
T8200-42-□□□M/ML	4	7/13	#14	*	4000	T32XXDX TSA-550				
T8200-42-□□□H/HL	5		#22		3000					
T8200-45-□□□M/ML	5		#14	032 064	3000					
T8200-45-□□□H/HL	5		#22		3000					
T8200-72-□□□H/HL	7		#22		3000					
T8200-75-□□□H/HL	7		#22		3000					
DT8200-42-□□□M/ML	4		#14	*	4000	Direct-drive AC Servo motor				
DT8200-42-□□□H/HL	5		#22		3000					
DT8200-45-□□□M/ML	5		#14	032 064	3000					
DT8200-45-□□□H/HL	5		#22		3000					
DT8200-72-□□□H/HL	7		#22		3000					
DT8200-75-□□□H/HL	7		#22		3000					
DT8200-42-□□□M/ML/C-11	4		#14		4000			V	V	
DT8200-42-□□□H/HL/C-11	5		#22		3000			V	V	
DT8200-45-□□□M/ML/C-11	5		#14		3000			V	V	
DT8200-45-□□□H/HL/C-11	5		#22		3000			V	V	
DT8200-72-□□□H/HL/C-11	7		#22		3000			V	V	
DT8200-75-□□□H/HL/C-11	7		#22		3000			V	V	
DT8200-42-□□□M/ML/C-13	4		#14		4000			V	V	V
DT8200-42-□□□H/HL/C-13	5		#22		3000			V	V	V
DT8200-45-□□□M/ML/C-13	5		#14		3000			V	V	V
DT8200-45-□□□H/HL/C-13	5		#22		3000			V	V	V
DT8200-75-□□□H/HL/C-13	7		#22		3000			V	V	V
DT8200-75-□□□H/HL/C-13	7		#22		3000			V	V	V

* 028,032,040,048,064,079,095,127,159,191,222,254,381

TABLE

Item No.	/ Size(Mm)			Description	Applicable Model
	Length	Width	Thickness		
DL7000T-T1	1200	540	45	Semi-submerged / Non-submerged	DL720, DL7200, DL7200B, DL7300, DL7400
T8200-T	1200	540	45	Semi-submerged / Non-submerged	T8200
DT8200-T	1200	540	45	Semi-submerged / Non-submerged	DT8200